





B L I N D I T F A S T E R

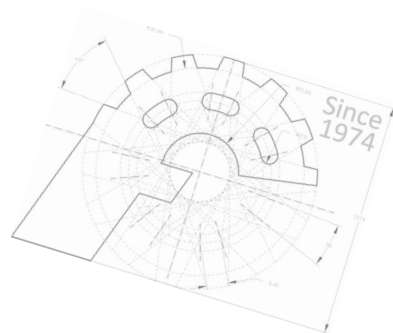


O V E R C O M E T H E P R E S S U R E

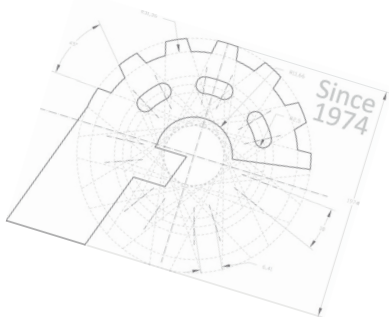

BLIND IT SAFER

[ H / V ] HORIZONTAL OR VERTICAL APPLICATION

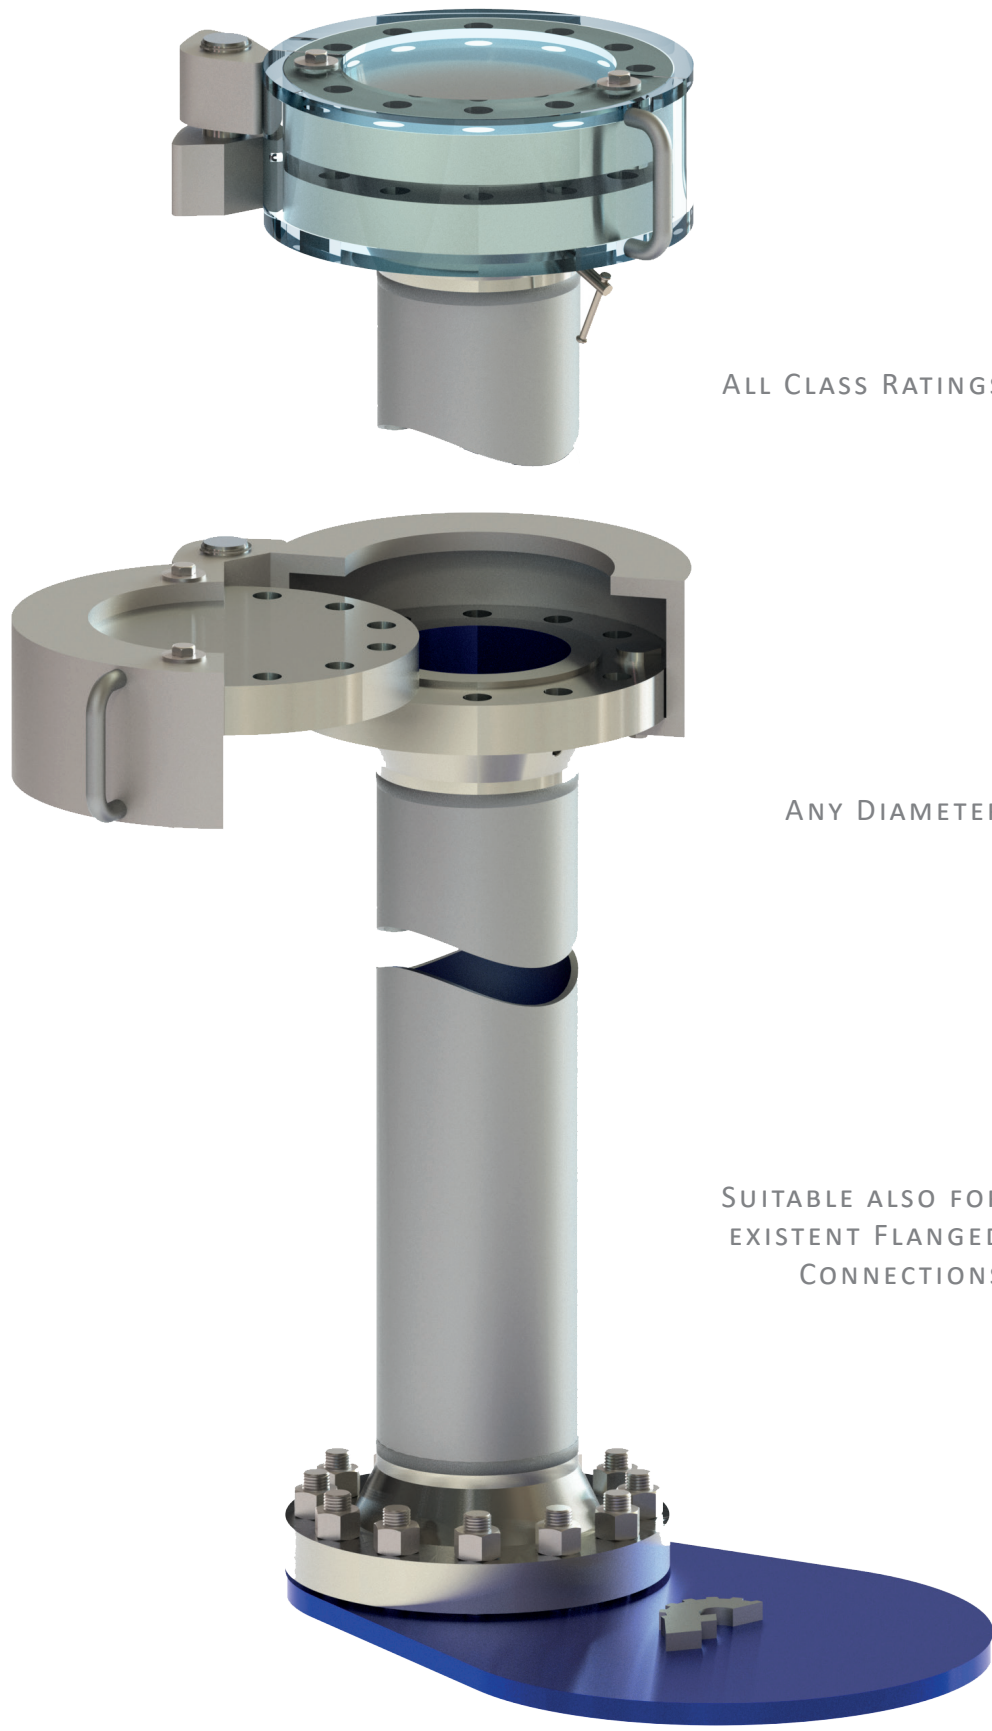

ALL CLASS RATINGS




ANY DIAMETER



SUITABLE ALSO FOR  
EXISTENT FLANGED  
CONNECTIONS




OVERCOME THE PRESSURE

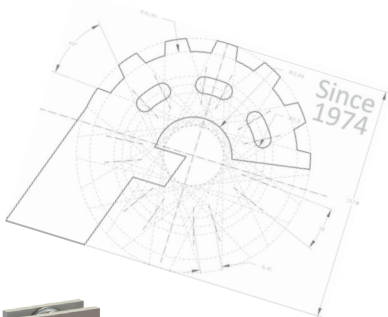




BLIND IT BETTER

CHOOSE YOUR

DIRECTION

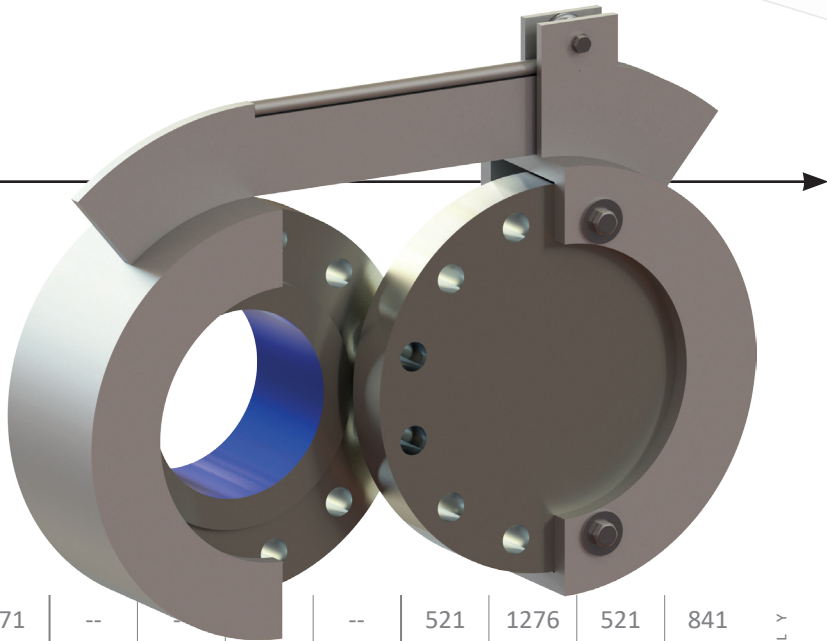


|                  |     |      |     |     |                   |     |     |     |                   |      |     |     |
|------------------|-----|------|-----|-----|-------------------|-----|-----|-----|-------------------|------|-----|-----|
| 24"              | 521 | 1285 | 662 | 471 | --                | --  | --  | --  | 521               | 1276 | 521 | 841 |
| 22"              | 482 | 1190 | 613 | 436 | --                | --  | --  | --  | 482               | 1182 | 482 | 779 |
| 20"              | 450 | 1112 | 573 | 408 | --                | --  | --  | --  | 450               | 1104 | 450 | 728 |
| 18"              | 412 | 1016 | 523 | 373 | --                | --  | --  | --  | 412               | 1009 | 412 | 665 |
| 16"              | 380 | 938  | 483 | 344 | --                | --  | --  | --  | 380               | 932  | 380 | 614 |
| 14"              | 334 | 825  | 425 | 303 | --                | --  | --  | --  | 334               | 819  | 334 | 540 |
| 12"              | 310 | 764  | 394 | 280 | 436               | 764 | 864 | 280 | 310               | 759  | 310 | 500 |
| 10"              | 282 | 695  | 358 | 255 | 397               | 695 | 786 | 255 | 282               | 690  | 282 | 455 |
| 8"               | 232 | 573  | 295 | 210 | 327               | 573 | 648 | 210 | 232               | 569  | 232 | 375 |
| 6"               | 127 | 342  | 134 | 117 | 278               | 487 | 550 | 179 | 197               | 483  | 197 | 319 |
| 5"               | 118 | 318  | 124 | 108 | 258               | 452 | 511 | 166 | 183               | 449  | 183 | 296 |
| 4"               | 149 | 403  | 157 | 137 | --                | --  | --  | --  | --                | --   | --  | --  |
| 3 1/2"           | 125 | 338  | 132 | 115 | --                | --  | --  | --  | --                | --   | --  | --  |
| 3"               | 115 | 310  | 121 | 106 | --                | --  | --  | --  | --                | --   | --  | --  |
| 2 1/2"           | 106 | 285  | 111 | 97  | --                | --  | --  | --  | --                | --   | --  | --  |
| 2"               | 91  | 244  | 95  | 83  | --                | --  | --  | --  | --                | --   | --  | --  |
| Ø                | A   | B    | C   | D   | A                 | B   | C   | D   | A                 | B    | C   | D   |
| Swinging [H + V] |     |      |     |     | Counterweight [H] |     |     |     | Sliding Davit [H] |      |     |     |

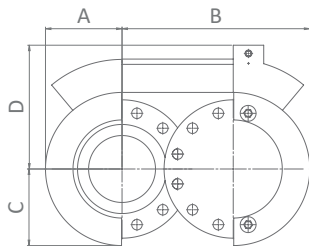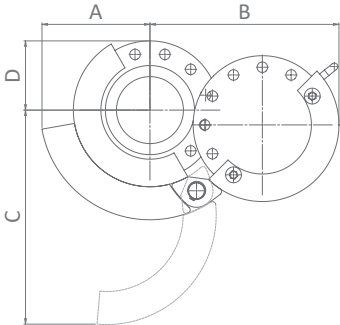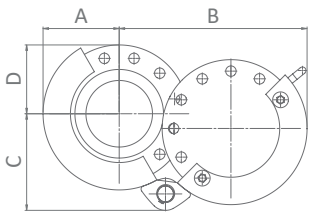

DIMENSIONS IN MM - FOR INFORMATION ONLY




OVERCOME THE PRESSURE

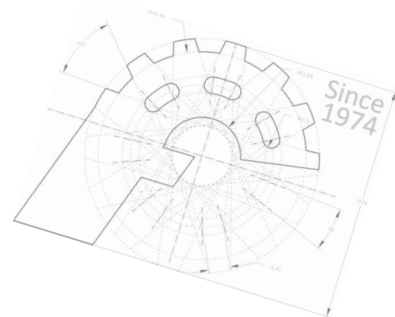

- ✓ Single Operator manoeuvring
- ✓ Fifteen seconds to Open or Close the System
- ✓ Engineered & tested according to both EN 13445 and ASME VIII Div.1 & 2
- ✓ Applicable also as Quick Opening Closure (QOC)
- ✓ No more Bolts & Nuts to be operated / maintained / replaced
- ✓ No more Wrench nor Special Tools
- ✓ No more one-time-use Gaskets
- ✓ Suitable also for existent Blind-Flanged Connections

Check it out on our YouTube Channel: visit [fulg-o-tube](https://www.youtube.com/fulg-o-tube)

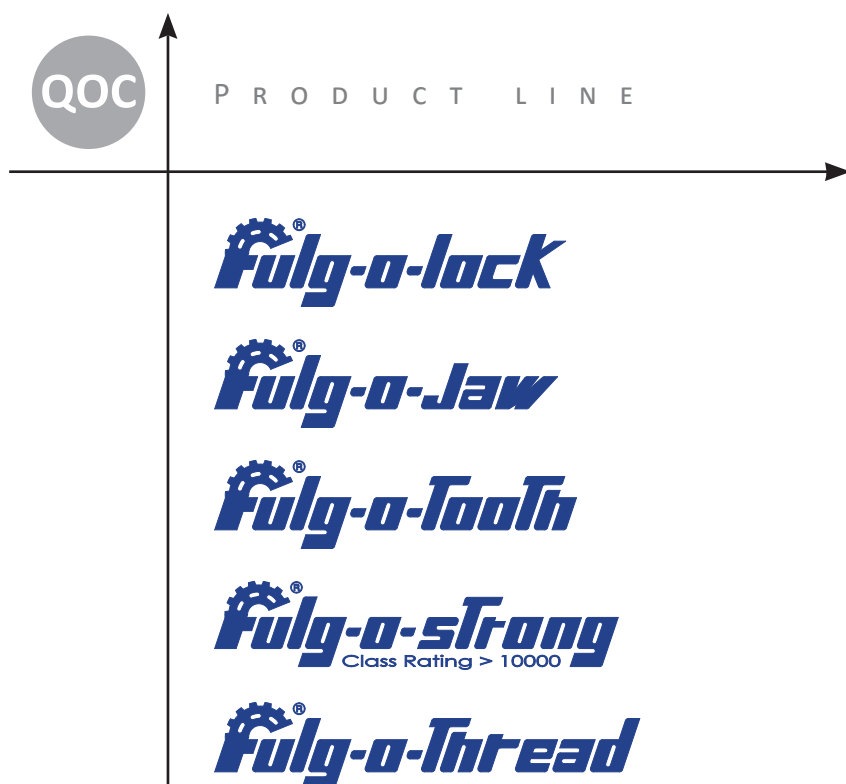

### FULGOSI S.r.l.

Via Emilio Grilli, sn.  
I-29010 San Nicolò  
PIACENZA – Italy  
[www.fulgosi.com](http://www.fulgosi.com)  
Ph. +39 0523 768482  
Fax +39 0523 768023

